


Replacing the main chip on Mk7 Quad Controller

1. Remove the 4 posi-head fixings from both ends of the quad controller.
2. Slide both the ends and fascia all off the box housing.
3. Locate the main chip and remove the old one, see picture below:



4. After removing the old pic, look at the new PIC supplied and locate the marking or divot on the replacement pic to the marking on the main PCB. This can clearly be seen on both photos as a divot on the replacement pic and a divot on the socket on the PCB.

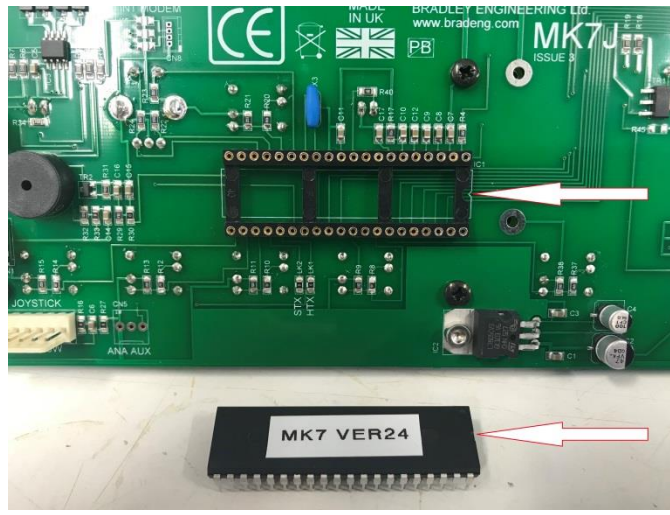

5. After all steps complete re-assemble, power on and re calibrate the joystick.

BR REMOTE

Broadcast Camera Systems

your vision

our focus

HOW TO GUIDE