

BR REMOTE

Broadcast Camera Systems

your vision

our focus

U3S – Mini Remote Head



- **Smooth & Quiet Operation**
- **Extremely Slow and Fast speeds**
- **Instantly Responsive**
- **VISCA Camera control**
- **Zoom & Focus Control**
- **Preset Positions**

The **U3/S** Mini Remote Head is built on the same chassis as the very popular Camball3. It is small and fully featured for both live-action moves and pre-set positions together with full camera and lens control using RS485 data from a Bradley controller.

Is it extremely quiet, with a fully proportional speed control from over 90deg/sec to 0.01deg/sec or less. This gives smooth moves even with tight lenses. The preset positions are achieved more quickly and with greater accuracy.

As standard the unit supports RS232 VISCA data to control the camera and lens. So any camera based on Sony modules will be controllable. BR Remote can also offer control of other cameras using different protocols.


This makes cabling extremely simple, using just a single 4-core XLR cable for both power and data to the remote head.

Inverted or even side mounting (for vertical shots) presents no problems for the head as the camera is centre-of-gravity balanced in both axis. Pan and Tilt clutches are fitted to protect the mechanics and for easy rigging.

As standard the **U3/S** can store 8 preset positions of pan, tilt, zoom and focus. Pan and tilt positions are accurate to within 0.4deg.

Up to 99 cameras and heads can be connected in a single Bradley system, although our normal controllers control 2, 4 or 8 remote cameras.

The **U3/S** does all the data and error handling internally and is optimised for live action control. Each head recognises its own ident, therefore the same controller can be used for all heads.

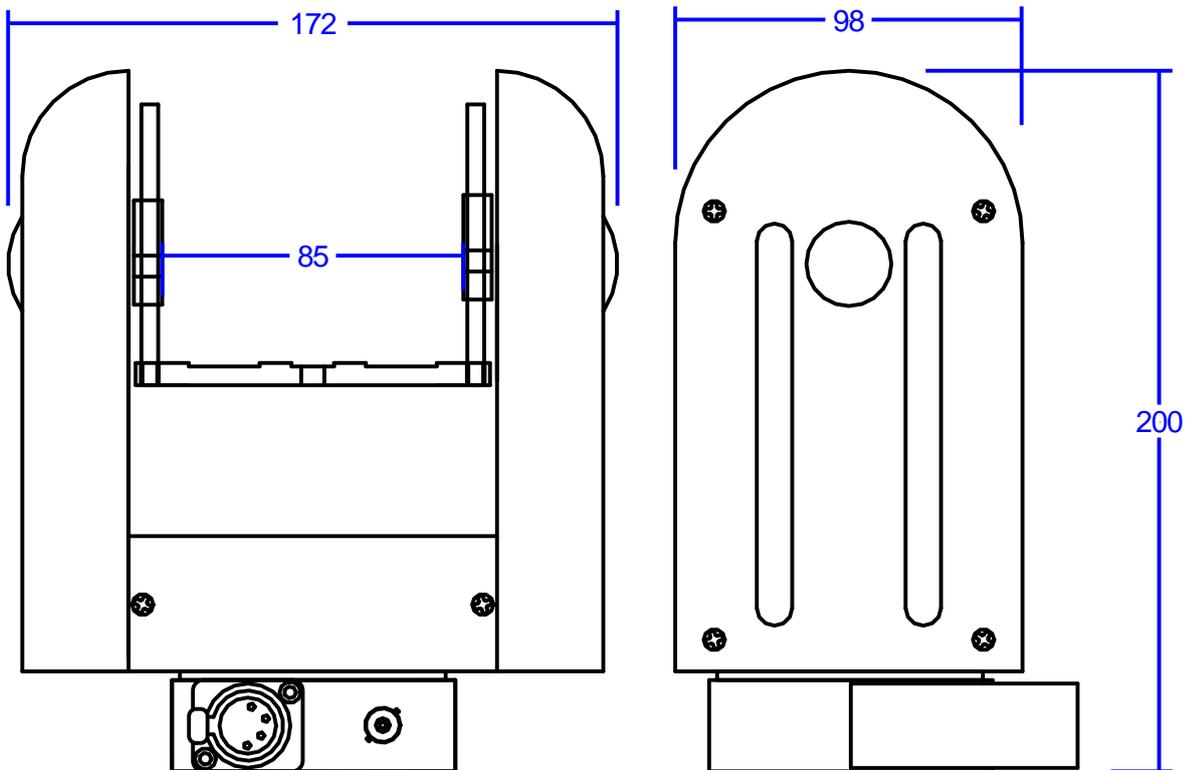

Weight: 1.7kg
Data: RS485
Power: 12v, 0.5A

Other versions available, **U3-4K**, **U3-P1** etc.

BR-Remote Ltd
Units 14 - 20, Setley Ridge Vineyard
Lymington Road
Brockenhurst
SO42 7UF. UK

www.br-remote.com
+44 (0)1590 622440

